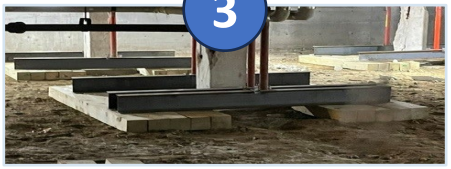
Article 11

Building & Field Structural Repairs

Capital Planning Committee · Fall Town Meeting 2026

Article 11: Three CPC Design Projects

Article total **$170,000** Funded from the Building Stabilization Fund (BSF)

	1	2	3
			
	High School Exterior Concrete Assessment & Design	**Lincoln School Field Landscaping / Turf Design**	**Mystic School Shoring Design**
Article 11 Cost (Design)	**$30,000**	**$40,000**	**$100,000**
Estimated Project Build	**~$0.25M**	**~$0.4M**	**~$1.0M**

Motion 1– WHS Exterior Concrete

THIS MOTION
$30,000

PLAN ESTIMATE
~$250k

CURRENT STATUS

- Mortar and masonry at the stairs and walls are crumbling, in places turning to powder
- Some railings are becoming structurally unsound
- Only ~8 years after the 2015–2018 renovation: too soon for this kind of decay

DESIGN SCOPE

- Outside engineer to find cause:
  - Flashing
  - Water getting in where railings pass through the caps
  - Masonry itself
- Cause will drive design plans + cost estimate




Broken brick and stone chips under a granite cap



Brick missing beside a granite cap, boards propped underneath



Mortar eroding from the joints of a brick planter wall

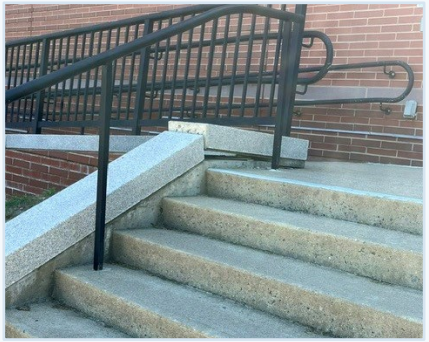

Railing posts set through granite caps: a likely path for water

Motion 2– Lincoln Field & Play Area

THIS ARTICLE
$40,000

PLAN ESTIMATE
~$400k



THE FIELD

- Doesn't drain and won't hold grass
- DPW reseeds every year, but students are back before it takes. Leads to bare dirt





THE PLAY SURFACE, MAIN STREET SIDE

- A former kindergarten play structure
- Failing: cracked, patched and pitted, at the end of its life

DESIGN SCOPE

- Designs and estimate site drainage / right surface material
- Evaluate and estimate play surface replacement

Motion 3– Mystic School Shoring

THIS ARTICLE
$100,000

PLAN ESTIMATE
~$1M

CURRENT STATUS

- Concrete columns that hold up two large classrooms (1950s addition) have deteriorated, with reinforcing steel exposed
- Temporary shoring is in place now: 21 posts at 10 columns under the first floor
- Existing shoring must stay, and be monitored, until permanent repairs are done

DESIGN SCOPE

- Further testing to find the cause, then design of the permanent repair, with construction documents and a cost estimate
- Cuts the risk of more deterioration and added temporary-shoring costs



Cracked column, exposed reinforcing steel, concrete breaking away, under the first floor



Temporary shoring in place: steel posts and beams